



**ROCKWHEEL**

**ROCKWHEEL**

**Rock & Concrete Grinders**



DEMOLITION



PROFILING



PRODUCTION



TRENCHING

# MAKE THE RIGHT CHOICE!

We offer cutting units for machines with an operating weight of 1 to 125 tons.

## THE LIGHTWEIGHT CHAMPION

### C2

Rockwheel with chain drive

- Power: 13 hp (9.5 kw)
- Maintenance-free chain drive unit
- 145 lbs - the lightest unit in the market
- Ideal for micro and mini excavators from 1 to 3 t



## ADVANTAGES

### PROTECTED MOTOR

Valve technology protects the hydraulic motor

### ONLY TWO HYDRAULIC LINES

No drain line required - works on hammer circuit

### TRANSMISSION RATIO

Gearbox units for maximum torque

### OPTIMIZED PICK LACING

Better and smooth cutting

### HEAVY-DUTY DESIGN

For the toughest job sites

### MOST EXPERIENCE ON THE MARKET

Invented and engineered by Webster-Technologies

## THE BEST SOLUTION FOR COMPACT-EXCAVATORS

### G5 / G5 TWIN

Rockwheel with gearbox drive

- Power:
  - G5: 30 hp (22 kW)
  - G5 Twin: 60 hp (44 kW)
- Transmission with ratio for maximum torque
- Available with a second motor for double the power
- For excavators from 3 to 12 t

## OPTIMUM VALUE FOR MONEY

### D10 / D15 D20 / D30

Rockwheel with direct drive

- Power:
  - D10: 40 hp (29 kW)
  - D15: 55 hp (41 kW)
  - D20: 94 hp (70 kW)
  - D30: 147 hp (110 kW)
- Robust Technology with only three main components: housing, motor and cutting drums
- For excavators from 8 to 38 t

## PURE POWER

### G40 / G50 G60 / G125

Rockwheel with gearbox drive

- Power
  - G40: 188 hp (140 kW)
  - G50: 188 hp (140 kW)
  - G60: 295 hp (220 kW)
  - G125: 536 hp (400 kW)
- Twin motor technology power and optimum weight distribution
- Solid and heavy-duty design for a long life
- For excavators from 40 to 125 t



**ROCKWHEEL CUTTING UNITS**

Type		<b>C2</b>	<b>G5</b>	<b>G5 twin</b>	<b>D10</b>	<b>D15</b>	<b>D20</b>	<b>D30</b>	<b>G40</b>	<b>G50</b>	<b>G60</b>	<b>G125</b>
Excavator weight	t	0.7 - 2.5	2.5 - 6	5 - 10	8 - 12	13 - 20	17 - 28	25 - 42	30 - 50	40 - 61	50 - 75	75 - 150
Hydraulic Input power	hp (kW)	13 (9.5)	30 (22)	60 (44)	40 (30)	55 (41)	94 (70)	147 (110)	188 (140)	188 (140)	295 (220)	536 (400)
W (w/o bracket)	lbs (kg)	145 (66)	400 (181)	440 (200)	950 (426)	1315 (595)	2535 (1170)	3183 (1444)	4250 (1932)	5419 (2458)	5463 (2478)	11,950 (5420)
Maximum pressure*	psi (bar)	3263 (225)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)	5800 (400)
Hydraulic Flow Range	US gpm	7.8 - 15	15 - 25	20 - 45	16 - 31	25 - 35	40 - 55	55 - 110	85 - 110	85 - 110	120 - 165	185 - 265
	l/min	30 - 60	56 - 95	76 - 170	60 - 121	94 - 133	150 - 208	208 - 412	320 - 415	320 - 414	455 - 625	700 - 1.000
Reduction ratio		1:1	2:1	2:1	1:1	1:1	1:1	1:1	1.2 : 1	1.2 : 1	1.2 : 1	1.2 : 1
Drum speed	rpm	80 - 155	70 - 120	50 - 107	80 - 155	75 - 105	50 - 75	50 - 80	45 - 75	45 - 75	45 - 65	40 - 50
Max. Torque	ft./lb (kNm)	420 (5.7)	3738 (5.1)	7476 (10.1)	3522 (4.8)	5861 (7.9)	13,206 (17.9)	19,715 (26.7)	29,502 (40)	31,695 (43)	47,316 (64.2)	115,750 (157)
Max. Cutting Force	lbs (kN)	949 (4.2)	6703 (29.8)	13,405 (59.6)	5076 (22.6)	7522 (33.4)	12,462 (55.4)	17,752 (79.0)	23,604 (105)	24,771 (110)	36,980 (164.5)	76,280 (339)
Drum diameter	in. (mm)	10 (270)	13 (340)	13 (340)	16 (423)	18 (475)	26 (646)	27 (677)	27 (684)	29 (726)	29 (726)	36 (925)
Drum width	in. (mm) * optional	12 (300)	16 (400) *20 (500)	16 (400) *20 (500)	29 (743)	33 (832)	42 (1058) *36 (910)	46 (1156) *37 (935)	33 (835)	41 (1050)	41 (1050)	59 (1494)
Cutter length	in. (mm)	20 (509)	24 (618)	24 (618)	31 (798)	37 (937)	45 (1155)	46 (1170)	37 (943)	53 (1356)	53 (1350)	66 (1686)

\* max oil flow and max. pressure should not be achieved simultaneously.  
Your sales person can recommend hydraulic settings.

# SUPERIOR ENGINEERING



CUTTER BUCKET



## ROCKWHEEL CUTTER BUCKET

Type		CB20	CB30
Operating weight	lb (kg)	4052 (1838)	4338 (1968)
Number of picks	No.	64	60
Drum diameter	in. (mm)	26 (646)	27 (677)
Cutter length	in. (mm)	39 (1000)	41 (1030)





## AXIAL CUTTER



## ROCKWHEEL AXIAL CUTTERS

Type		TC20	TC30	AX20	AX30
Operating weight	lb (kg)	2092 (962)	3183 (1173)	1955 (885)	2137 (968)
Number of picks	No.	32	30	32	30
Size of pick holder	in. (mm)	1 (25.4)	1.4 / 1.1 (38/30)	1 (25.4)	1.4/1.1 (38/30)
Drum diameter	in. (mm)	26 (650)	27 (680)	25 (646)	27 (678)
Cutter length	in. (mm)	39 (1000)	41 (1030)	53 (1340)	54 (1382)

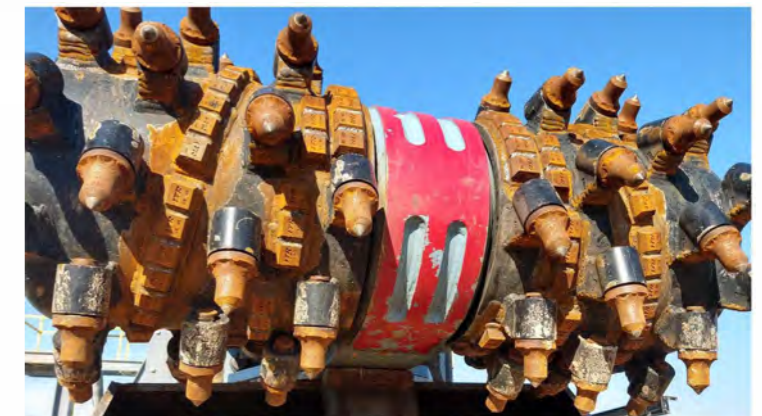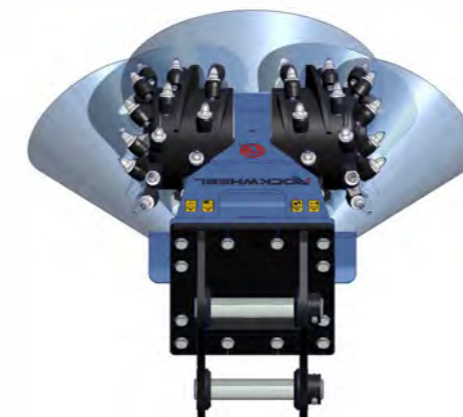

## ROCKWHEEL OPTIONS

Options	C2	G5	D10	D15	D20	D30	G40	G50	G60	G125
Excavation Drum	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Profiling Drum		✓	✓	✓	✓	✓	✓	✓	✓	✓
Demolition Drum		✓	✓	✓	✓	✓	✓	✓	✓	✓
Stump Grinding	✓	✓	✓	✓	✓					
360 Rotator	✓	✓	✓	✓	✓	✓				
Water/Ripper Bar		✓	✓	✓	✓	✓	✓	✓	✓	
Pick Options		✓	✓	✓	✓	✓	✓	✓	✓	✓

Rockwheel designed by

**WEBSTER**  
TECHNOLOGIES



# WHEN IS A ROCKWHEEL MOST EFFECTIVE?



Rock Removal Working Range, by Implement Type



**Rockzone Americas**  
 801 Pleasant View Blvd.  
 Bellefonte, PA 16823 USA

PH: +1 814.466.7134  
 FAX: +1 814.355.0046  
[www.rockzoneamericas.com](http://www.rockzoneamericas.com)  
[info@rockzoneamericas.com](mailto:info@rockzoneamericas.com)



814-466-7134  
[info@RockzoneAmericas.com](mailto:info@RockzoneAmericas.com)  
[RockzoneAmericas.com](http://RockzoneAmericas.com)  
 801 Pleasant View Blvd Bellefonte, PA 16823 USA